



WEAR REDUCES EQUIPMENT LIFE.

New LOCTITE® PC 7332™ Nordbak® Wear Resistant Coating extends it up to 3x.

THE PROBLEM

Damage from abrasion in critical equipment like pumps, chutes and ducts in power generation, steel manufacturing, mining and other process industries can lead to:

- Increased and unplanned downtime
- Reduced equipment life
- Reduced efficiency
- Decreased Mean Time Between Failure (MTBF)

THE LOCTITE® SOLUTION

LOCTITE® PC 7332™ can solve all of those problems. Designed to protect, rebuild and repair high wear areas of slurry processing equipment under wet conditions, it can also be used for fine particle abrasion under dry conditions in transport elbows, chutes and other equipment. Its silicon carbide filled 2K epoxy system gives it a wide range of applications across multiple industry segments.

LOCTITE® PC 7332™ BENEFITS:



1. Silicon carbide based 2K epoxy offers better abrasion resistance than aluminium oxide based epoxies.



2. Resilience to fine particle abrasion under wet conditions makes it the preferred choice for applications involving slurries and liquids.



3. Excellent dry and wet temperature resistance is suitable for a wide range of industrial applications.



4. Easy to mix and apply and will not sag or slump.



5. Functional cure in only 6 hours, reducing downtime.



Henkel


LOCTITE® PC 7332™ Nordbak® Wear Resistant Coating

Product	IDH	Pack Size	Coverage	Color	Max. Operating Temp.	Compressive Strength [N/mm ²]	Shore D Hardness	Working Time [min.]	Functional Cure [hrs.] 77°F [25°C]	Mix Ratio by Volume	Mix Ratio by Weight
LOCTITE® PC 7332™	2751067	10 kg kit	0.74 m ² @ 6 mm thick per 10 kg kit	Grey	248°F (120°C)	96.9 N/mm ²	85	30 min.	6 hrs.	4:1	4:1

Total Volume Loss Over Time


Miller Slurry Abrasion Test

■ LOCTITE® PC 7332™ ■ Competitor

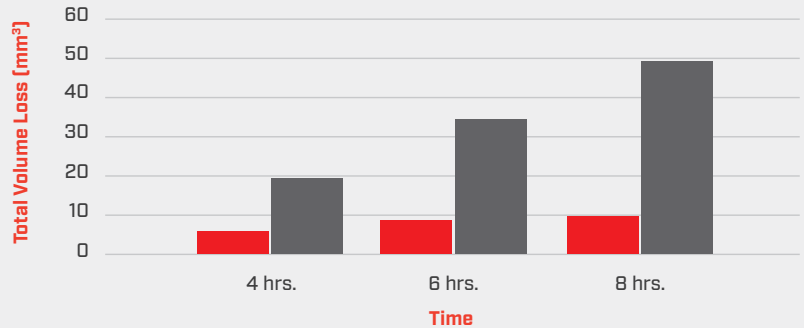

LOCTITE®'s full line of Nordbak® high-performance wear protection coatings is designed specifically for the needs of the most demanding industries. They form a protective barrier that prevents wear, extends the life of critical equipment up to 3x vs competitive products, and gets machines back up and running fast. All powered by the expertise in industrial maintenance and innovative technology that makes LOCTITE® a market leader and trusted choice among maintenance and repair professionals worldwide.

TYPICAL APPLICATIONS:



Contact Your Local Applied® Service Center
1-877-279-2799



DISCLAIMER: The above content is provided by the supplier. Applied® does not guarantee the accuracy or timeliness of the content. The above content is provided "AS IS", AND ANY AND ALL EXPRESS AND IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS ARE HEREBY EXCLUDED. All warranties, if any, are solely from the supplier.

Authorized distributor:



Corporate Headquarters
1 Applied Plaza
Cleveland, Ohio 44115
Toll Free Phone: 1-877-279-2799
Applied.com